DOORS

NOTES	LOCATION	MARK	SIZE	THICK	TYPE	MAT	LOCK	CLOSER	THRESHOLD	REMARKS
	LWR. MAIN FT	1	3080	1 3/4"	SOLID	FIBERGLASS	SCHLAGE	GLOBAL	ALUM	
	LWR NORTH EX	2	3068	1 3/4"	SOLID	FIBERGLASS	SCHLAGE	GLOBAL	ALUM	
	LWR LOBBY	3	3068	1 3/4"	SOLID	FIBERGLASS	SCHLAGE	GLOBAL	ALUM	
	LWR EAST EX	3	3068	1 3/4"	SOLID	FIBERGLASS	SCHLAGE	GLOBAL	ALUM	
	UPR CRY EX	4	3068	1 3/4"	SOLID	FIBERGLASS	SCHLAGE	GLOBAL	ALUM	
	UPR SANC.	5	3080	1 3/8"	SOLID	MASONITE	SCHLAGE	GLOBAL		
	UPR CRYING	6	3080	1 3/8"	SOLID	MASONITE	SCHLAGE	GLOBAL		
	RESTRM'S	7	3068	1 3/8"	SOLID	MASONITE	SCHLAGE	GLOBAL		
	BAPTISTRY	8	2068	1 3/8"	HC	MASONITE	SCHLAGE			

WINDOWS

	UPPER	A	3050		SH	VINYL	INSULATED LITES TOP AT 8'-6" FRM SUB-FL
	LOWER	B	3060		SH	VINYL	INSULATED LITES TOP AT 8'-0" F.M SLAB

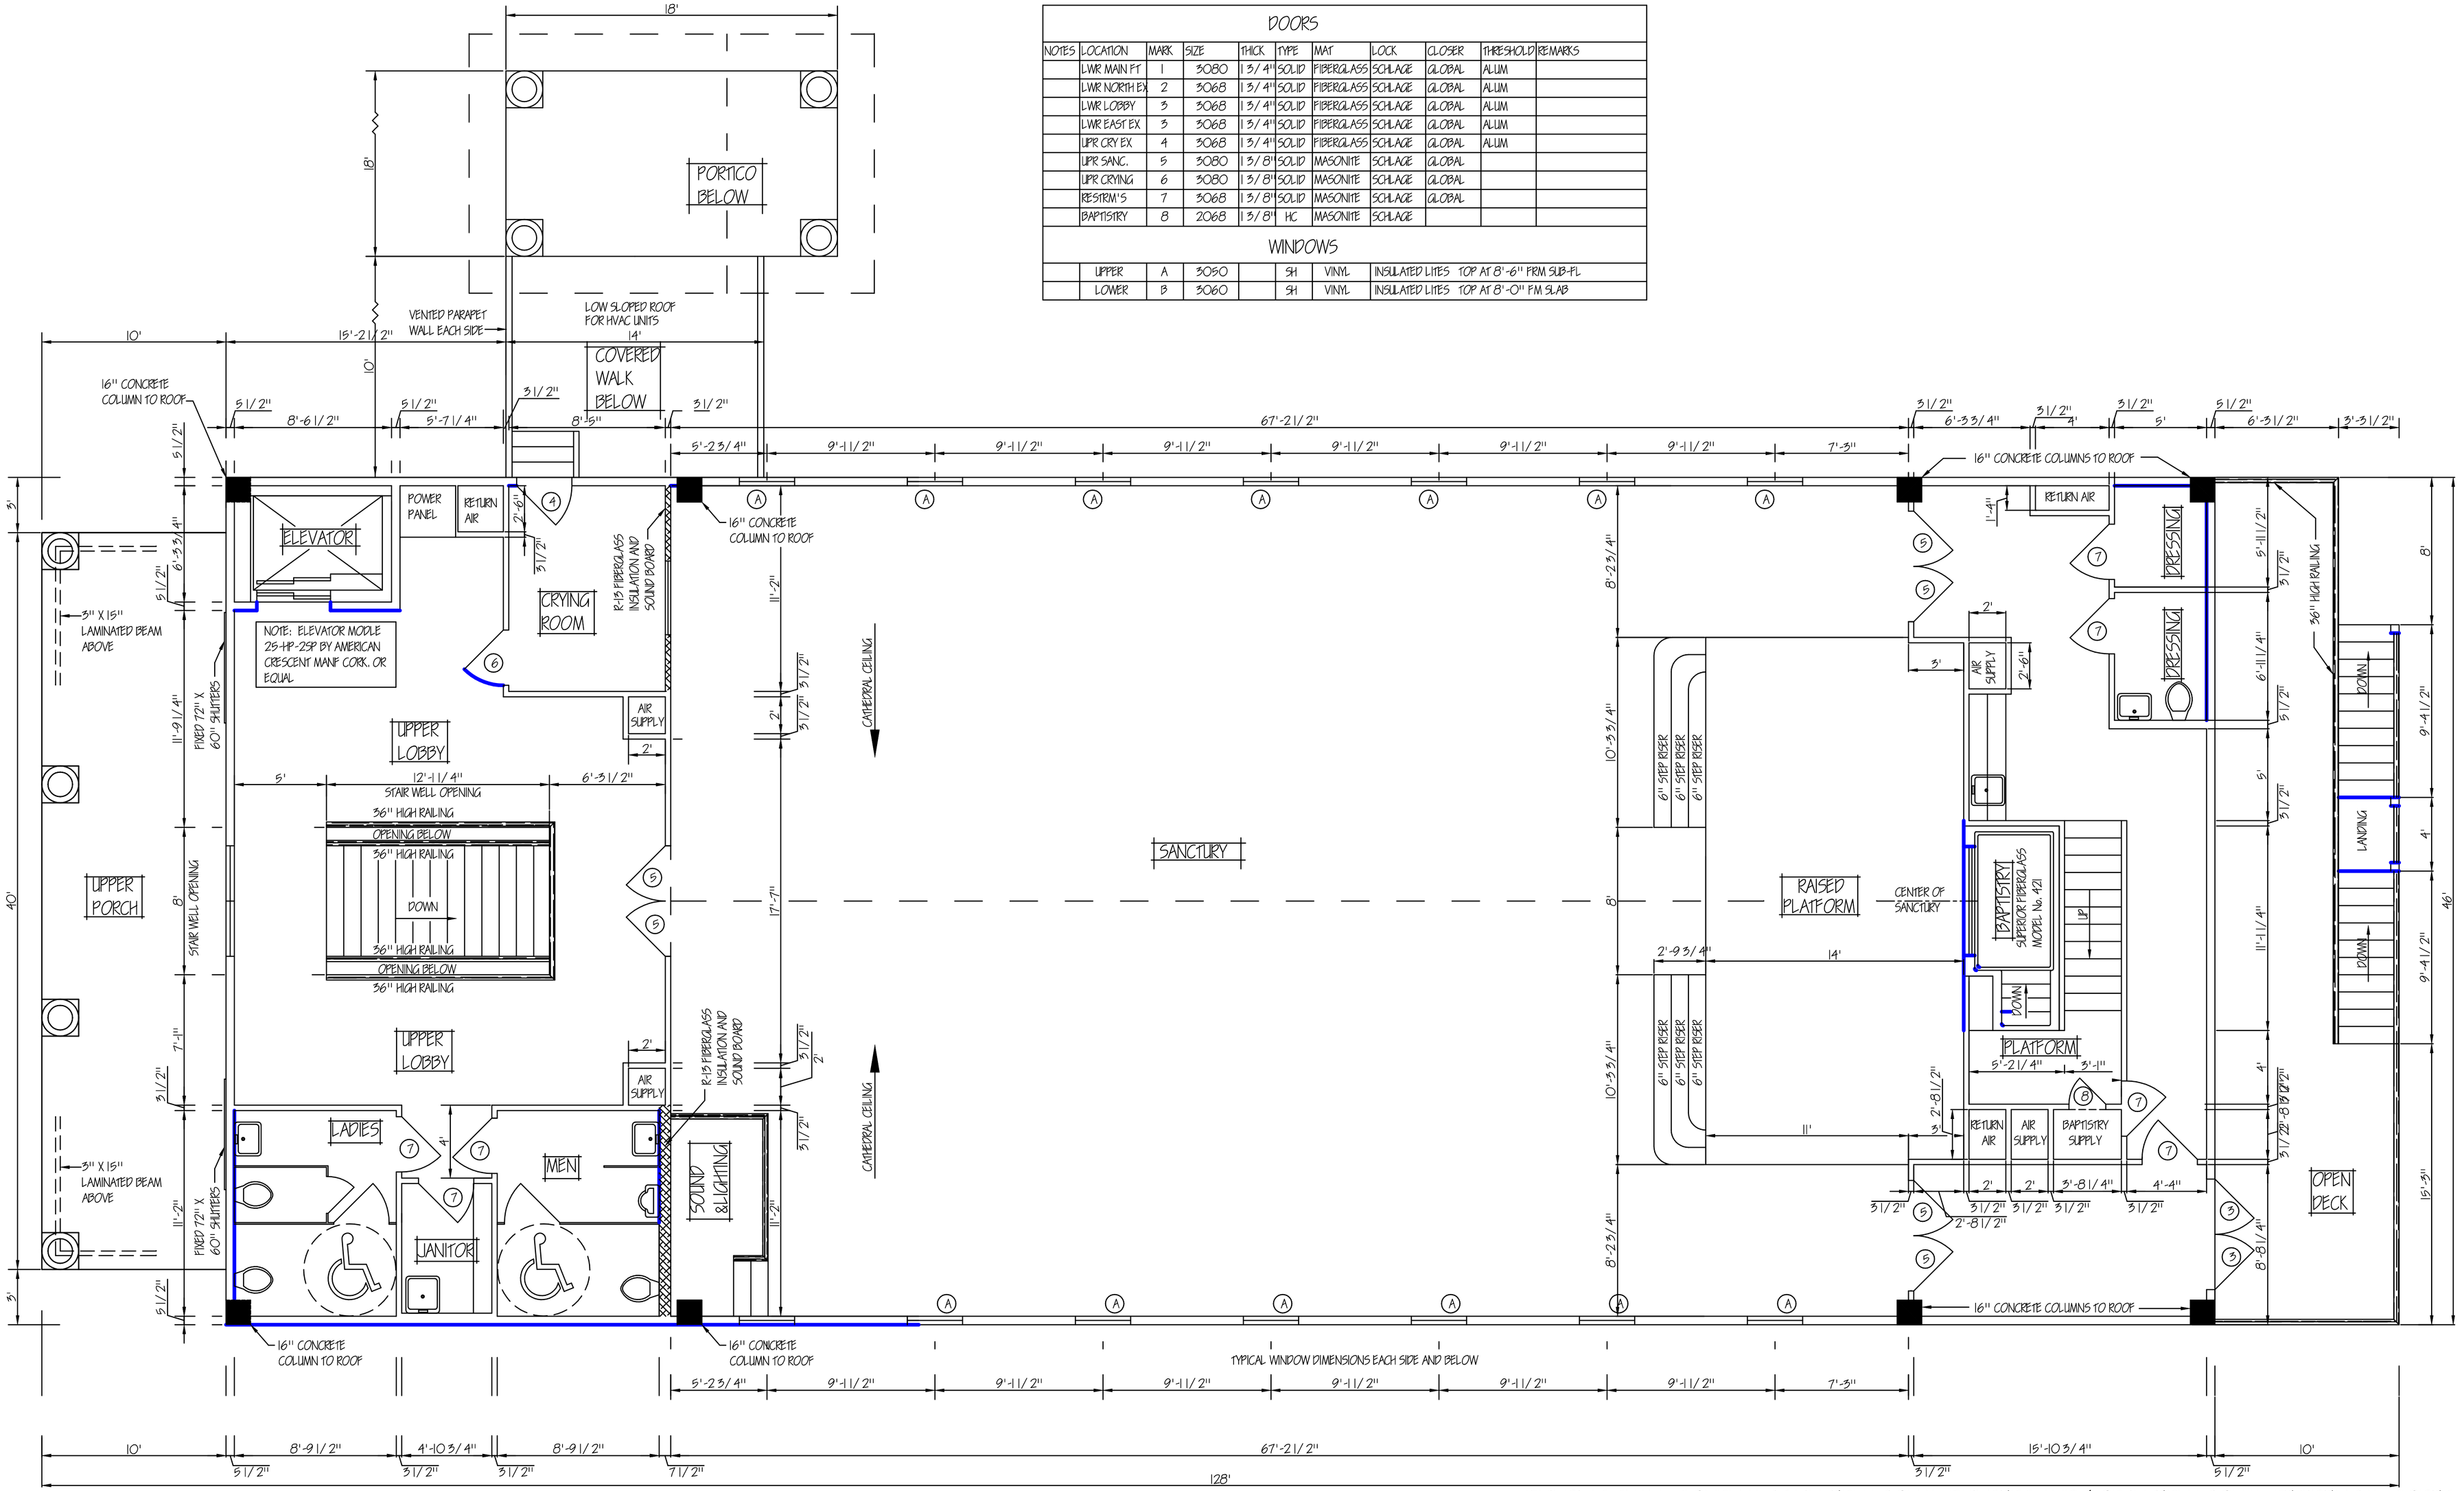

BUILDING SHALL CONPLY WITH INTERNATIONAL BUILDERS AND/OR INTERNATIONAL RESIDENTIAL CODES

MAIN FLOOR

REVISIONS	
DATE:	REMARKS:

DATE: NOV 24, 2010		DESIGNED BY: RDS
SCALE: 1/4" = 1'-0		DRAWN BY: RDS
JOB NO.		CHECKED BY: RDS

doug's plan Service
Doug Stewart
4210 Stewart Lane
Perkinston, MS 39573
228/255-5259

PLANS FOR NEW SANCTUARY
6028 LAKESHORE ROAD
BAY ST LOUIS, MS 39520

LAKESHORE BAPTIST CHURCH
6028 LAKESHORE ROAD
BAY ST LOUIS, MS 39520

HATTAWAY ENGINEERING INCORPORATED
P.O. BOX 363 CARRIERE, MS 39426
PH. (601) 798-1978 FAX. UPON REQUEST
"ENGINEERING THE FUTURE"
"REMEMBERING THE PAST"